
Capacitive Sensors BCS R08RRE-POM80C-EP00,3-GS75 Order Code: BCS012U





1) Sensing surface, 2) Housing, 3) Cover, 4) Power indicator green, 5) Function indicator yellow

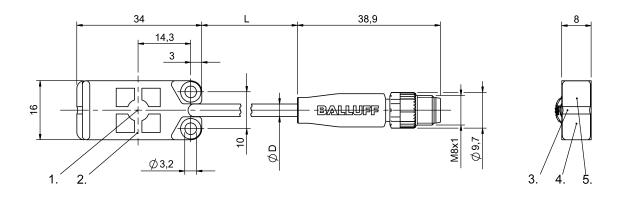

Basic features

Approval/Conformity	cULus
	CE
	UKCA
	WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Holder
	Installation guide
Sensitivity	Switching distance teachable
Series	R08
Trademark	Global

Display/Operation

Function indicator	yes
Power indicator	yes
Setting	Teachable

Electrical connection

Cable diameter D	3.40 mm
Cable length L	0.3 m
Conductor cross-section	0.14 mm ²
Connection	4-pin
Number of conductors	4
Number of pins	4
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.33 µF
No-load current lo max. at Ue	12.5 mA
Operating voltage Ub	1230 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current le	50 mA
Rated operating voltage Ue DC	24 V
Ready delay tv max.	200 ms
Residual current Ir max.	10 µA
Ripple max. (% of Ue)	10 %
Switching frequency	50 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V
Environmental conditions	
Environmental conditions Ambient temperature	-2570 °C
	-2570 °C 1
Ambient temperature	
Ambient temperature Contamination scale	1
Ambient temperature Contamination scale	1
Ambient temperature Contamination scale IP rating	1
Ambient temperature Contamination scale IP rating Functional safety	1 IP67
Ambient temperature Contamination scale IP rating Functional safety	1 IP67
Ambient temperature Contamination scale IP rating Functional safety MTTF (40 °C)	1 IP67

Capacitive Sensors BCS R08RRE-POM80C-EP00,3-GS75 Order Code: BCS012U



Material

PP
PP
PUR
PP
34 x 16 x 8 mm
for flush mounting

Block style

0.2 Nm

Range/Distance

20.0 %
18 mm
8 mm
5.0 %
20 % [-555 °C]

Remarks

Tightening torque

Size


For full calibration connect input DI to L+ for 2...7 seconds. For empty calibration connect to L+ for 7..12 seconds. Input DI can be used for teaching the switching point. In normal operation input DI should be connected continuously to L-. For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams (Schematic)



Capacitive Sensors BCS R08RRE-POM80C-EP00,3-GS75 Order Code: BCS012U



Help Views

