




1) Pressure resistant area

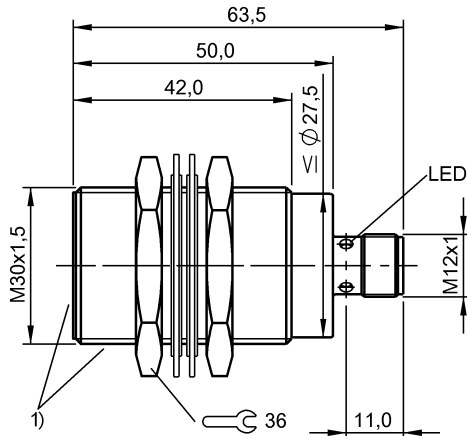

Basic features

Approval/Conformity	CE UKCA WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 µF
Min. operating current Im	0 mA
No-load current Io max., damped	16 mA
No-load current Io max., undamped	9 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	47.0 kOhm
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	35 ms
Residual current Ir max.	100 µA
Ripple max. (% of Ue)	15 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	2 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Inductive Sensors
BES M30EG1-PSC20Z-S04G-S12
Order Code: BES03JK

BALLUFF

Material

Housing material	1.4305 stainless steel, PTFE coated
Material sensing surface	1.4305 stainless steel

Mechanical data

Dimension	Ø 30 x 63.5 mm
Installation	for flush mounting
Mounting length	42.00 mm
Pressure rating max.	40 bar
Pressure rating, note	Pressure-resistant
Size	M30x1.5
Tightening torque	80 Nm ±10 %

Range/Distance

Assured operating distance Sa	16 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	20 mm
Real switching distance sr	20 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■ ■
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

When installing in metals the switching distance may be reduced by up to 50%. Installation Instructions 841020.
Installation permitted only in clamp without positive stop.
The sensor is functional again after the overload has been eliminated.
LED flashes between 100% and approx. 70% of Sr

Connector Drawings



Wiring Diagrams (Schematic)

