



FS-V12P

Fiber Amplifier, Cable Type, Expansion Unit, PNP

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

This model has been discontinued.
Compliance with the certification standard is ensured as of the time of shipment from our company.

Recommended Replaceable Products: Digital Fiber Optic Sensor - FS-N40 series

Specifications

| Model | | FS-V12P |
|---------------------------------|----------------------|---|
| Туре | | 1-line expansion unit |
| Output | | PNP |
| Light source | | Red LED |
| Response time | | 250 μs (FINE) /500 μs (TURBO) /1 ms (SUPER TURBO) |
| Operation mode | | LIGHT-ON/DARK-ON (switch-selectable) |
| Indicator lamp | | Display indicator: Red LED Digital LED monitor: Seven segments, four digits, red LED Bar LED monitor: One orange LED and six green LEDs |
| Timer function | | ON-delay: 40 ms /OFF-delay: 10 ms /Timer OFF (switch-selectable) |
| Control output | | PNP open-collector 100 mA max. (24 VDC max.), Residual voltage: 1 V max. |
| Protection circuit | | Reversed polarity protection, over-current protection, surge absorber |
| Unit expansion | | Up to 16 expansion units can be connected (a total of 17 units).*1 |
| Mutual interference suppression | | FINE : 4, TURBO/SUPER: 8 |
| Rating | Power voltage | 12 to 24 VDC ±10 %, Ripple (P-P) 10 % or less*2 |
| | Current consumption | 50 mA or less |
| Environmental resistance | Ambient light | Incandescent lamp: 10,000 lux max., Sunlight: 20,000 lux max. |
| | Ambient temperature | -10 to +55 °C 14 to 131 °F (No freezing) |
| | Relative humidity | 35 to 85 % RH (No condensation) |
| | Vibration resistance | 10 to 55 Hz, Double amplitude 1.5 mm 0.06", 2 hours in each of the X, Y, and Z directions |
| | Shock resistance | 500 m/s ² , 3 times in each of the X, Y, and Z directions |
| Case material | | Polycarbonate |
| Weight | | Approx. 45 g |

^{*1} If more than one unit is used together, the ambient temperature varies with the conditions below. Mount the units on the DIN rail with mounting brackets and check that the output current is 20 mA or less.


3 to 10 Units: -10 to 50°C 14 to 122°F, 11 to 16 Units: -10 to 45°C 14 to 113°F

*2 Neither the FS-V12 nor the FS-V10 can be used as a standalone unit.



Dimensions

* Download CAD file or product manual for larger image/text and more detail.

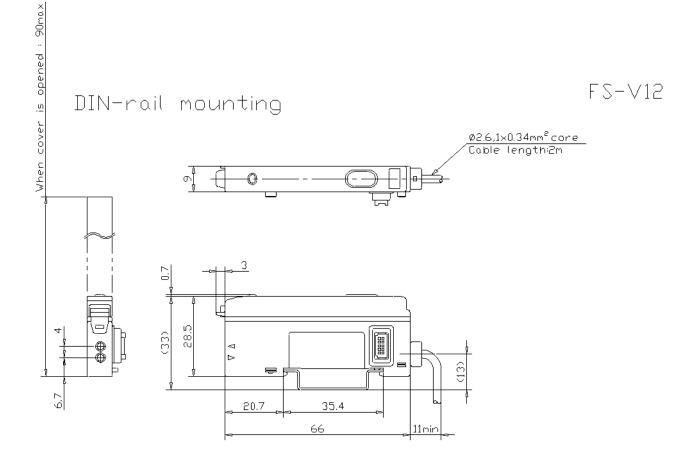




I/O Circuit Connection diagram

* Download CAD file or product manual for larger image/text and more detail.

I/O Circuit

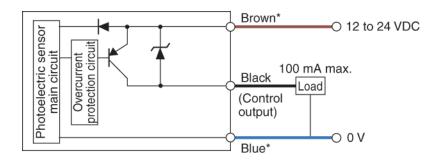

*FS-V11P only