

1) Sensing surface



**Basic features**

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2

**Display/Operation**

Function indicator	yes
Power indicator	no

**Electrical connection**

Cable diameter D	2.10 mm
Cable length L	2 m
Conductor cross-section	0.073 mm <sup>2</sup>
Connection type	Cable, 2.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

**Electrical data**

Load capacitance max. at Ue	0.2 µF
Min. operating current Im	1 mA
No-load current Io max., damped	3 mA
No-load current Io max., undamped	9 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	Open collector
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	150 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	20 ms
Residual current Ir max.	10 µA
Ripple max. (% of Ue)	10 %
Switching frequency	3000 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

**Environmental conditions**

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

**Interface**

Switching output	PNP normally closed (NC)
------------------	--------------------------

## Material

Housing material	Stainless steel
Material jacket	PUR
Material sensing surface	PBT

## Mechanical data

Dimension	Ø 6.5 x 6 mm
Installation	for flush mounting
Size	D6.5


## Range/Distance

Assured operating distance Sa	1.2 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	1.5 mm
Real switching distance sr	1.5 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %


## Remarks

For mounting and installation see Accessories section  
 Max. pull force on cable 10 N.  
 EMC: EMC protection circuit required, see 825345. IVW: 2.2  
 The sensor is functional again after the overload has been eliminated.

## Wiring Diagrams (Schematic)



## Help Views

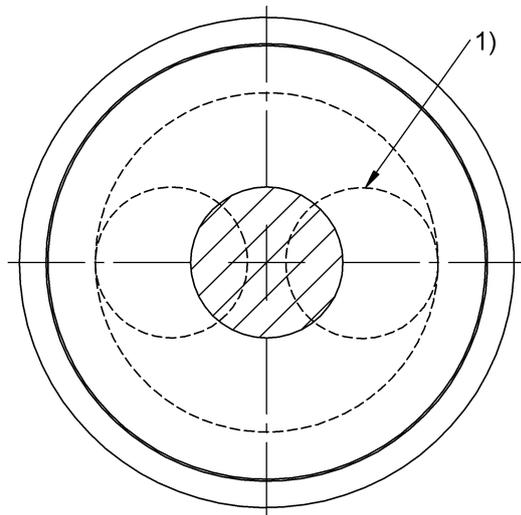

1) Cable outlet eccentric poss.