




1) Pressure resistant area

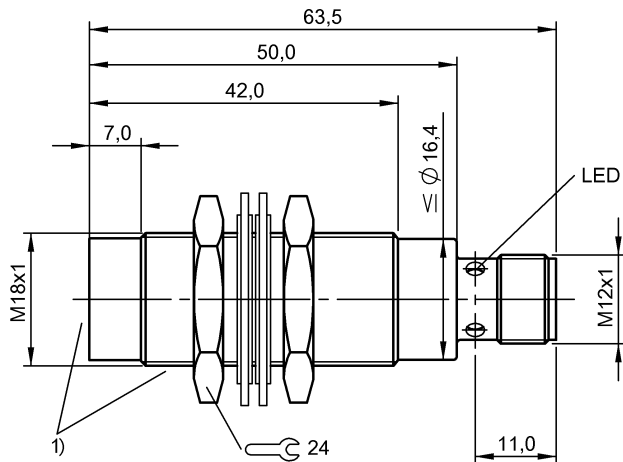

Basic features

Approval/Conformity	CE cULus WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 µF
Min. operating current Im	0 mA
No-load current Io max., damped	16 mA
No-load current Io max., undamped	9 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	47.0 kOhm
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	10 ms
Residual current Ir max.	100 µA
Ripple max. (% of Ue)	15 %
Switching frequency	200 Hz
Utilization category	DC -13
Voltage drop static max.	2 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	375 a
--------------	-------

Inductive Sensors
BES M18EF1-PSC20F-S04G-S
Order Code: BES02Y1

BALLUFF

Interface

Switching output PNP normally open (NO)

Material

Housing material Stainless steel

Material sensing surface Stainless steel

Mechanical data

Dimension Ø 18 x 63.5 mm

Installation non-flush

Mounting length 35.00 mm

Pressure rating max. 60 bar

Pressure rating, note Pressure-resistant

Size M18x1

Tightening torque 50 Nm ±10 %

Range/Distance

Assured operating distance Sa 16.2 mm

Hysteresis H max. (% of Sr) 15.0 %

Rated operating distance Sn 20 mm

Real switching distance sr 20 mm

Repeat accuracy max. (% of Sr) 5.0 %

Switching distance marking ■■

Temperature drift max. (% of Sr) 10 %

Remarks

The sensor is functional again after the overload has been eliminated.

Installation permitted only in clamp without positive stop.

When installing in metal see Installation Instructions 939231.

LED flashes between 100% and approx. 70% of Sr

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams (Schematic)

