




1) Reference edge, 2) Sensing surface, 3) Sealing ring, 4) Function indicator FD/FE/LL

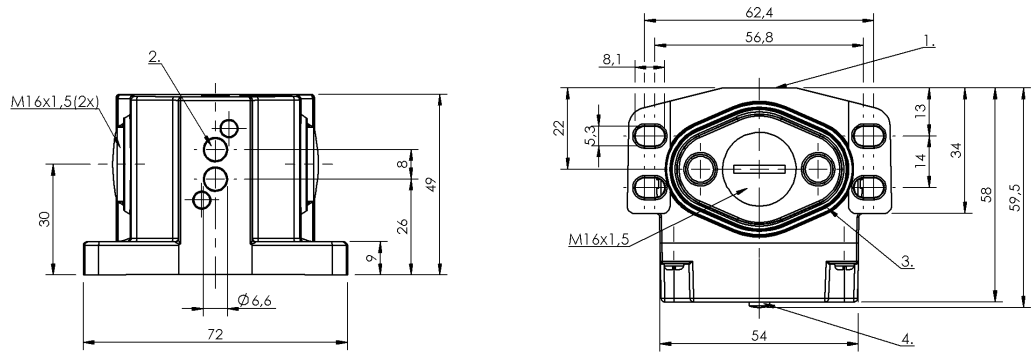

Basic features

Approval/Conformity	CE UKCA WEEE
Basic standard	IEC 60947-5-2
Operating principle	1-2. Switch position: Inductive
Version	Inductive

Display/Operation

Function indicator	1-2. Switch position: Optical fiber
--------------------	-------------------------------------

Electrical connection

Connection type	1-2. Switch position: Screw terminal
-----------------	--------------------------------------

Electrical data

Continuous current	1-2. Switch position: 0.13 A
Rated operating voltage U _e	1-2. Switch position: 24 V DC

Environmental conditions

Ambient temperature	-25...70 °C
IP rating	IP67

Functional safety

MTTF (40 °C)	BES 517-311-Y: 1620 a
--------------	-----------------------

Interface

Switching output	NPN normally open (NO)
------------------	------------------------

Material

Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized

Mechanical data

Distance cam - active surface	1-2. Switch position: 0...0.90 mm
Flange, feed-through	1 threaded exit M16
Switching element	1-2. Switch position: BES 517-311-Y

Range/Distance

Assured operating distance S _a	1-2. Switch position: 0.9 mm
Range	1.1 mm
Rated operating distance S _n	1-2. Switch position: 1.1 mm

Wiring Diagrams (Schematic)

