


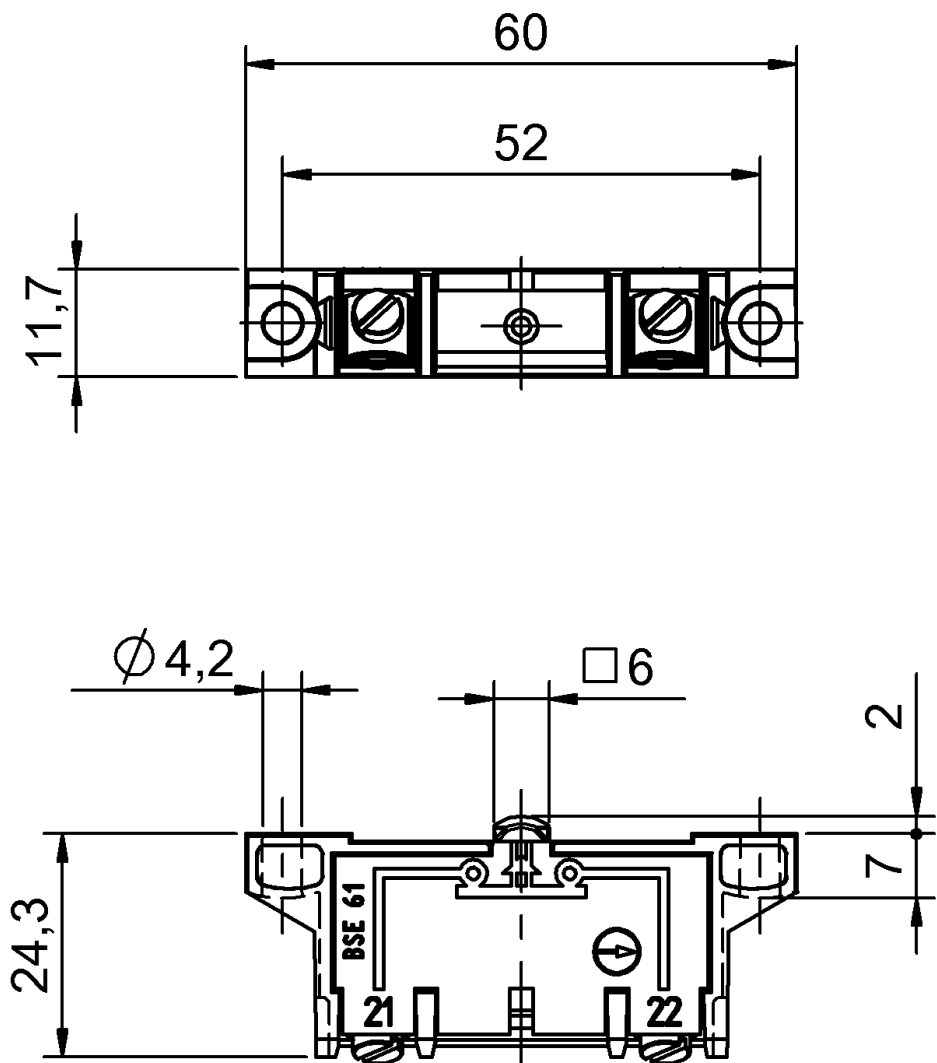

Basic features

Approval/Conformity

CE
UKCA
CCC
WEEE

Use with series

BSW 813-493
BSW 813-494
EGT F60
RGT 100
RGT 61

RGT 62
RGT 72

Electrical connection

Connection	M3
Connection type	1. Switch position: Screw terminal
Contact system	Double-interrupting NC forced-opening per VDE

Electrical data

Contact arrangement	NC: 21+22
Contact resistance max.	40 mOhm
Contact resistance max., note	New condition
Continuous current	1. Switch position: 6.0 A
Mechanical life expectancy min.	30 mil. switching operations
Minimum load at 24 V DC	20 mA
Nominal voltage	250 VAC
Switching operations per minute	300
Switching principle	Creep circuit

Environmental conditions

Ambient temperature	-5...85 °C
---------------------	------------

Material

Cover material	Thermoplast
Housing material	Thermoplast, GF
Material contacts	Silver
Material contacts	1. Switch position: Silver

Mechanical data

Connection cross-section	1.5 mm ²
Switching actuation force min.	3.00 N
Tightening torque max.	120 Ncm