



FU-56TZ

Fiber Unit Thrubeam type

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications


Model		FU-56TZ*1
Type		fibre unit
Shape		Thrubeam
Minimum bend radius		R2 mm
Minimum detectable object		Opaque material with a diameter of 0.005 mm0.0002" *2
Environmental resistance	Enclosure rating	IP67 (IEC60529)
	Ambient temperature	-40 to +50 °C -40 to 122 °F (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
Weight		Approx. 20 g

*1 For details on the detecting distance, see the fiber amplifier catalog.
*2 The minimum detectable object is the value when the detecting distance and sensitivity have been set to their optimal state.

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

fu-56tz_dimension_01.gif

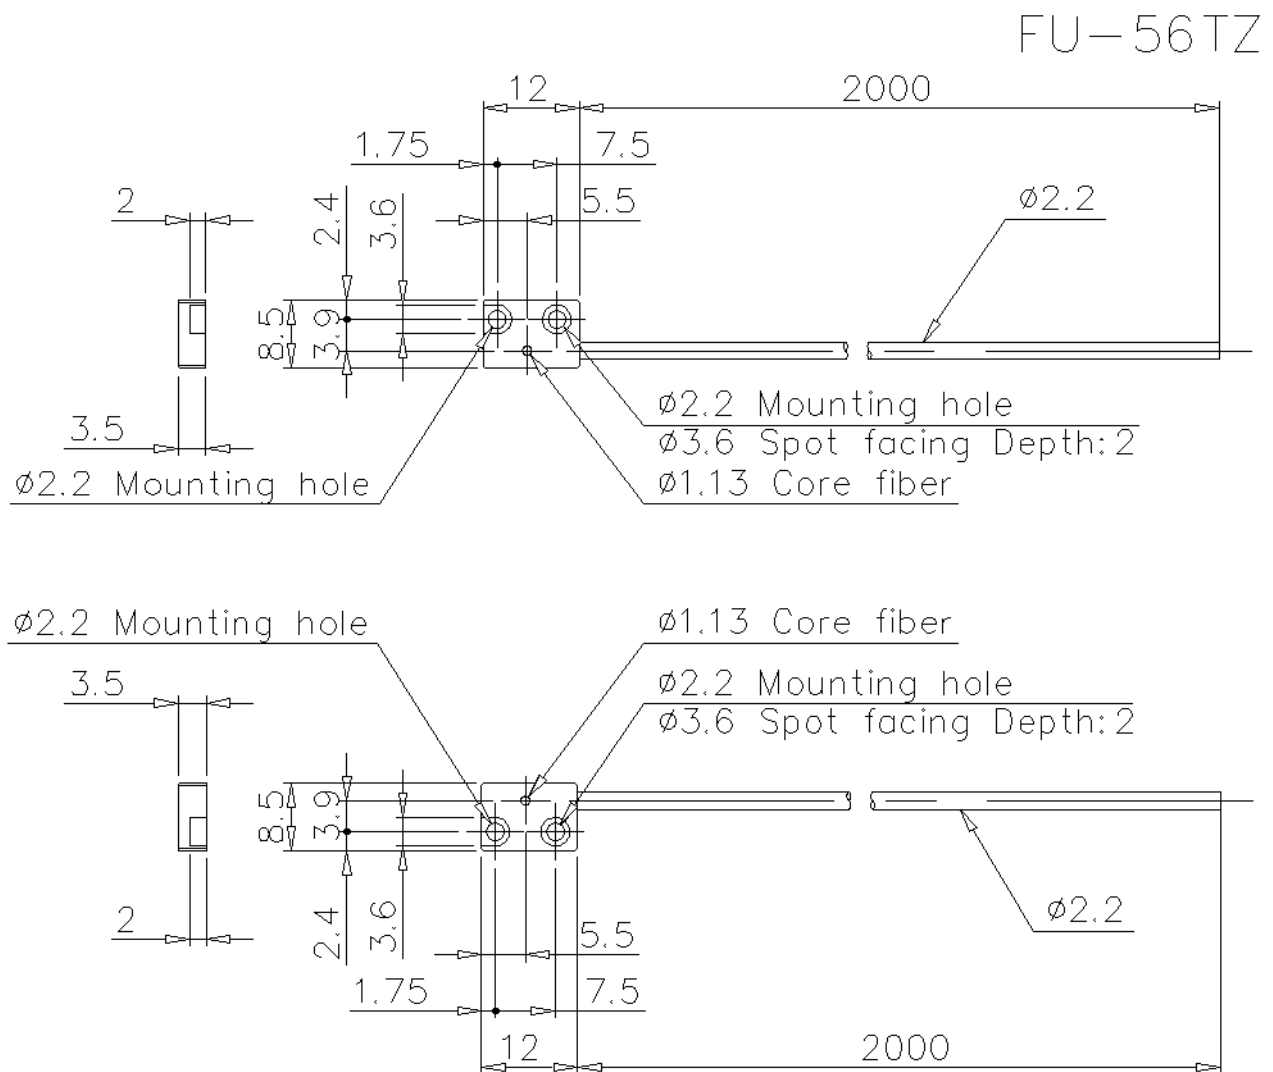

Housing: Aluminum alloy(Fluorine coating)

Supplied Accessories

M2 Screw: $P=0.4 \times L=6$, Iron nickel plating

M2 Nut: Width across flats=4, t=1.2, Iron nickel plating

Fiber cutter