



GV-H130

Sensor Head Medium-distance Type



*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications

Model			GV-H130
Type			Mid-range
Light source			Visible semiconductor laser, Wavelength: 655 nm
Laser class	FDA (CDRH) Part 1040.10		Class 2 (560 μW)
	IEC 60825-1		
	JIS C6802		
Detection distance (Amplifier display)			55 to 130 mm 2.17" to 5.12" (750 to 0)*1)
Possible display range			768 to -98
Standard detection deviation			1 mm 0.04"
Spot diameter			Approx. ø0.3 mm ø0.012" (Detection distance 130 mm 5.12")
Operation status indicators			Control output: Red LED/Laser radiation emission indicator: Green LED/1 spot indicator: Green LED
Environmental resistance	Enclosure rating		IP67
	Operating ambientluminance	Incandescent lamp	10000lx
		Sunlight	20000lx
	Ambient temperature		-10 to +50 °C 14 to 122 °F (No freezing)
	Relative humidity		35 to 85 % RH (No condensation)
Vibration resistance		10 to 55 Hz, Double amplitude 1.5 mm 0.06", 2 hours in each of the X, Y, and Z axis	
Material			Housing material: PBT, Display: Polyarylate, Metal: SUS304, Lens cover: Glass, Cable: PVC
Weight			Approx. 130 g*2


*1 General guideline for amplifier display values relative to detection distance (when distance display mode is set to normal).
*2 Including 2 m **6.6'** connector cable (3 m **9.8'** cable for GV-H1000)

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

SENSOR HEAD





GV-H130/GV-H130L

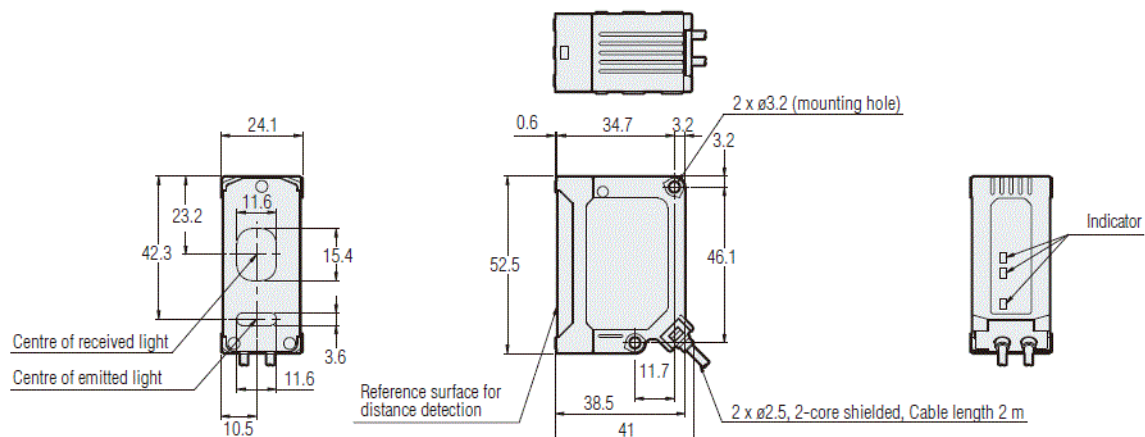


Mounting bracket (accessory)

Supplied screw (2 pcs.)
M3, P=0.5, L=30
Material: SUS

Material: SUS304
t=2.0

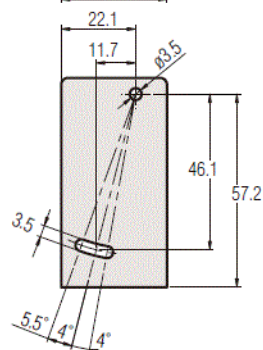

Insulation sheet (accessory) When the insulation sheet is attached

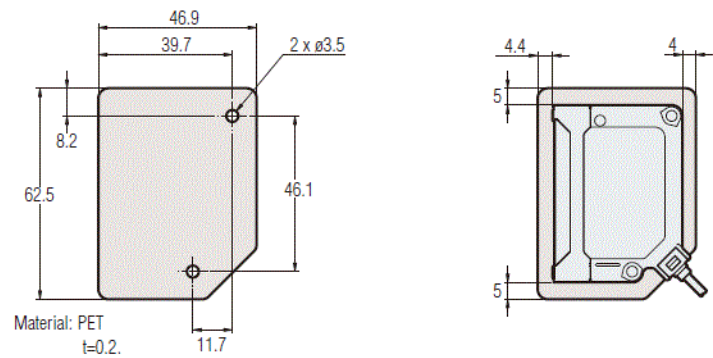

When the mounting bracket is attached

