



IA-065

Sensor Head

CE

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications

Model		IA-065
Reference distance		65 mm 2.56"
Measurement range		55 mm to 105 mm 2.17" to 4.13"
Light source	Type	Red semiconductor laser, wavelength: 655 nm (visible light)
	Laser class	Class II (FDA (CDRH) Part1040.10) Class 2 (IEC 60825-1)
	Output	560 μ W
Spot diameter (at standard distance)		Approx. 550 x 1,750 μ m 21.65 x 68.9 Mil
Linearity		\pm 0.1% of F.S. (F.S.= \pm 10 mm 0.39" , 55 to 75 mm 2.17" to 2.95")*1
Repeatability		4 μ m 0.16 Mil *2
Sampling cycle		0.33/1/2/5 ms (4 levels available)
Operation status indicators		Laser warning: Green LED, Analog output: Red LED, Measurement center: Green LED
Temperature characteristics		0.06% of F.S./ $^{\circ}$ C (F.S.= \pm 10 mm 0.39" , 55 to 75 mm 2.17" to 2.95")
Environmental resistance	Enclosure rating	IP67
	Ambient light	Incandescent lamp: 7,500 lux*3
	Ambient temperature	-10 to +50 $^{\circ}$ C 14 to 122 $^{\circ}$F (No condensation or freezing)
	Relative humidity	35 to 85 % RH (No condensation)
	Vibration resistance	10 to 55 Hz, Double amplitude 1.5 mm 0.06" , 2 hours in each of the X, Y, and Z axis
Material		Housing material: PBT Metal parts: SUS304 Packing: NBR Lens cover: Glass Cable: PVC
Weight		Approx. 130 g (including cable)

*1 Value when measuring the KEYENCE standard target (white diffuse object).


*2 Value when measuring the KEYENCE standard target (white diffuse object) at the reference distance, sampling rate: 1 ms, and average number of times: 16.

*3 Value when the sampling rate is set to 2 ms or 5 ms.


Dimensions

* Download CAD file or product manual for larger image/text and more detail.


IA-065

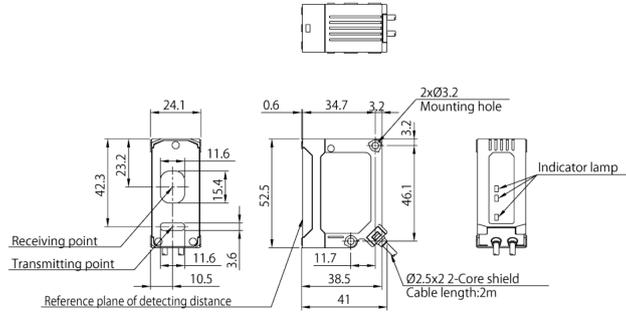




Insulating sheet(Accessory)



When the insulating sheet is attached.



Mounting bracket(Accessory)

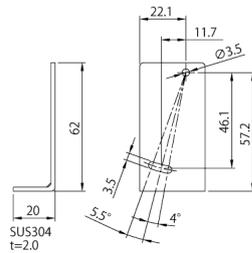

When mounting bracket is attached

