



IV4-L4M

External light unit for smart camera Narrow field of view monochrome



*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications


Model		IV4-L4M
Compatible sensor		IV4-400MA
Lights	Illumination	Infrared LED
Power supply		Power supplied via connected sensor
Environmental resistance	Enclosure rating	IP67 *1
	Ambient temperature	0 to +50°C 32 to +122°F (no freezing)
	Relative humidity	85% RH or less (no condensation)
Material		Main unit case: Aluminum die-casting. Front cover: Acrylic *2
Weight		Approx. 195 g 6.88 oz

*1 Only when attached to applicable sensor. Except when polarizing filters (OP-88644/OP-88645/OP-88646/OP-88647) are installed.
*2 ESD safe, IEC61340-5-1 compliant.


Dimensions

* Download CAD file or product manual for larger image/text and more detail.


IV4-L4C/L4M/L5C/L5M/L6C/L6M

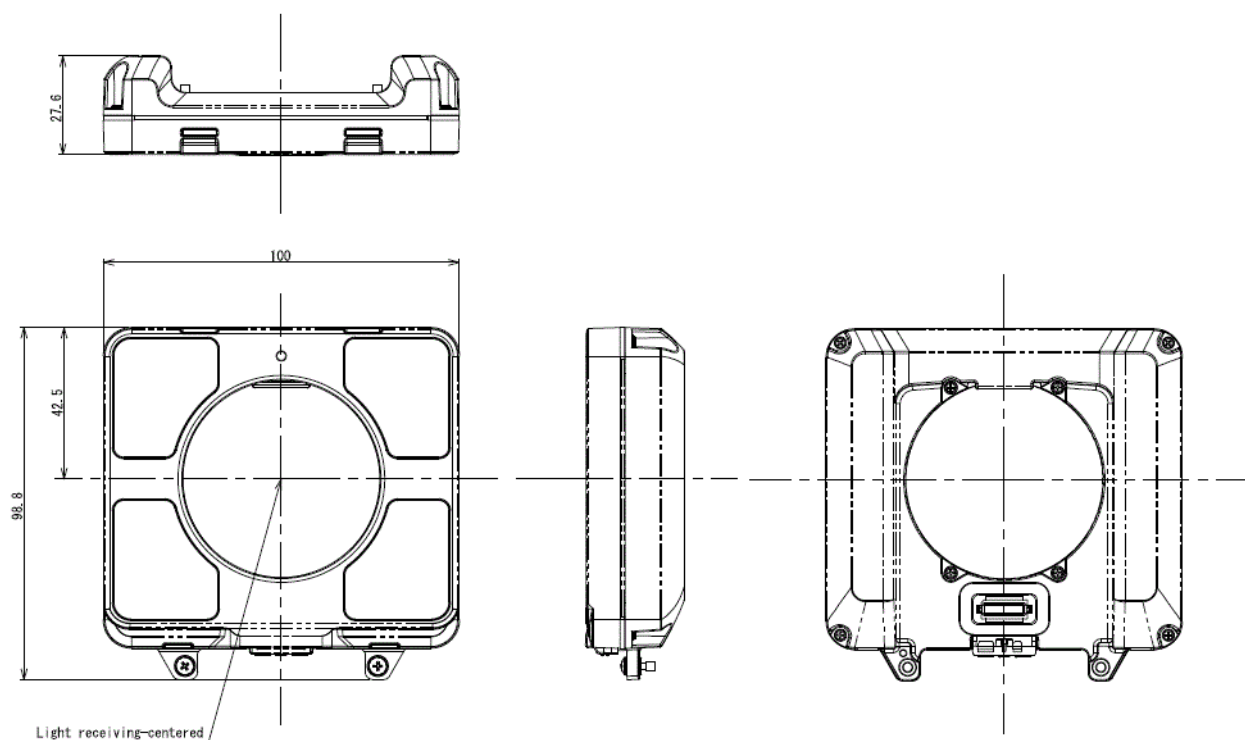


IV4-400CA/400MA/500CA/500MA/600CA/600MA
IV4-L4C/L4M/L5C/L5M/L6C/L6M

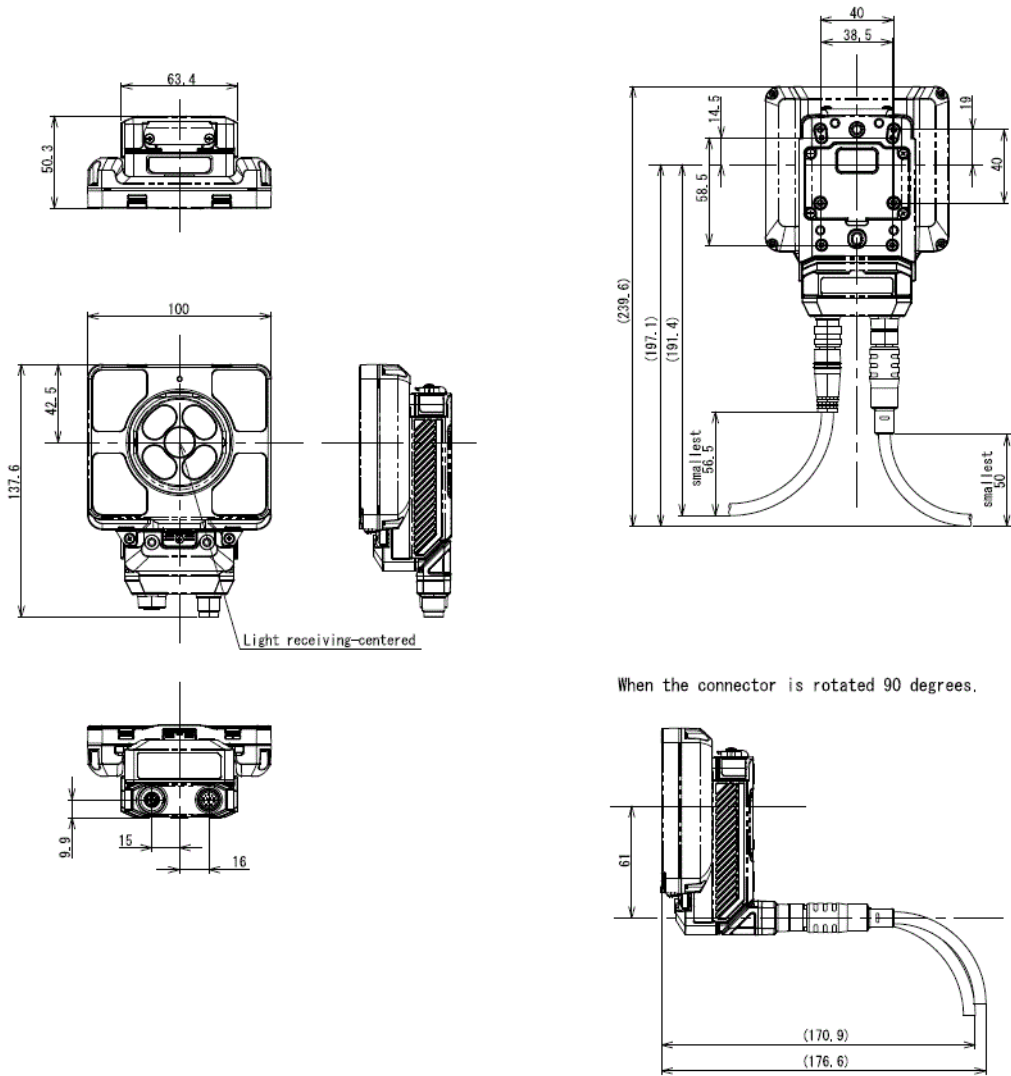


IV4-400CA/400MA/500CA/500MA/600CA/600MA
IV4-L4C/L4M/L5C/L5M/L6C/L6M
OP-88644/OP-88645

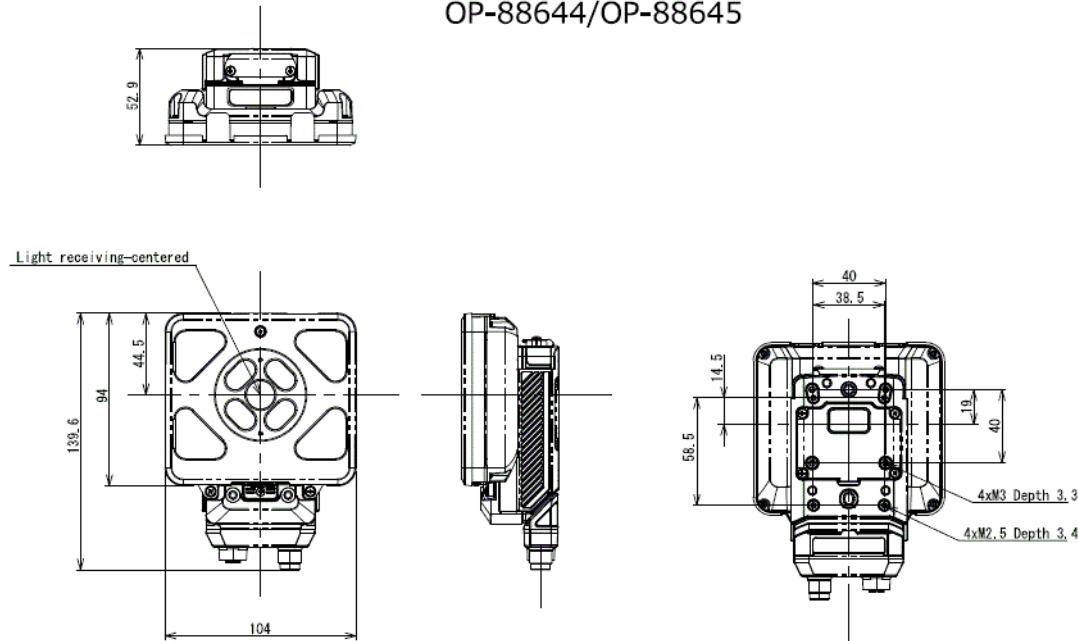

IV4-400CA/400MA/500CA/500MA/600CA/600MA
IV4-L4C/L4M/L5C/L5M/L6C/L6M
OP-88911

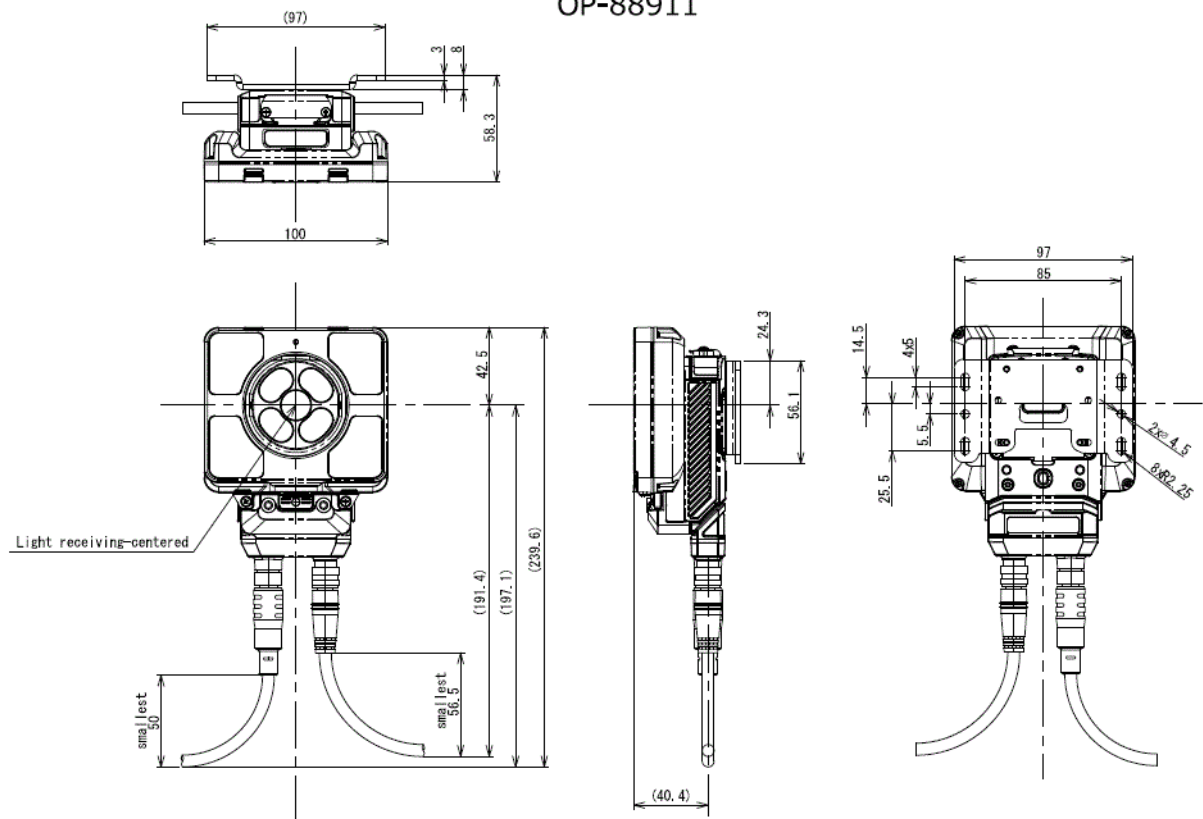

IV4-400CA/400MA/500CA/500MA/600CA/600MA
IV4-L4C/L4M/L5C/L5M/L6C/L6M
OP-88912

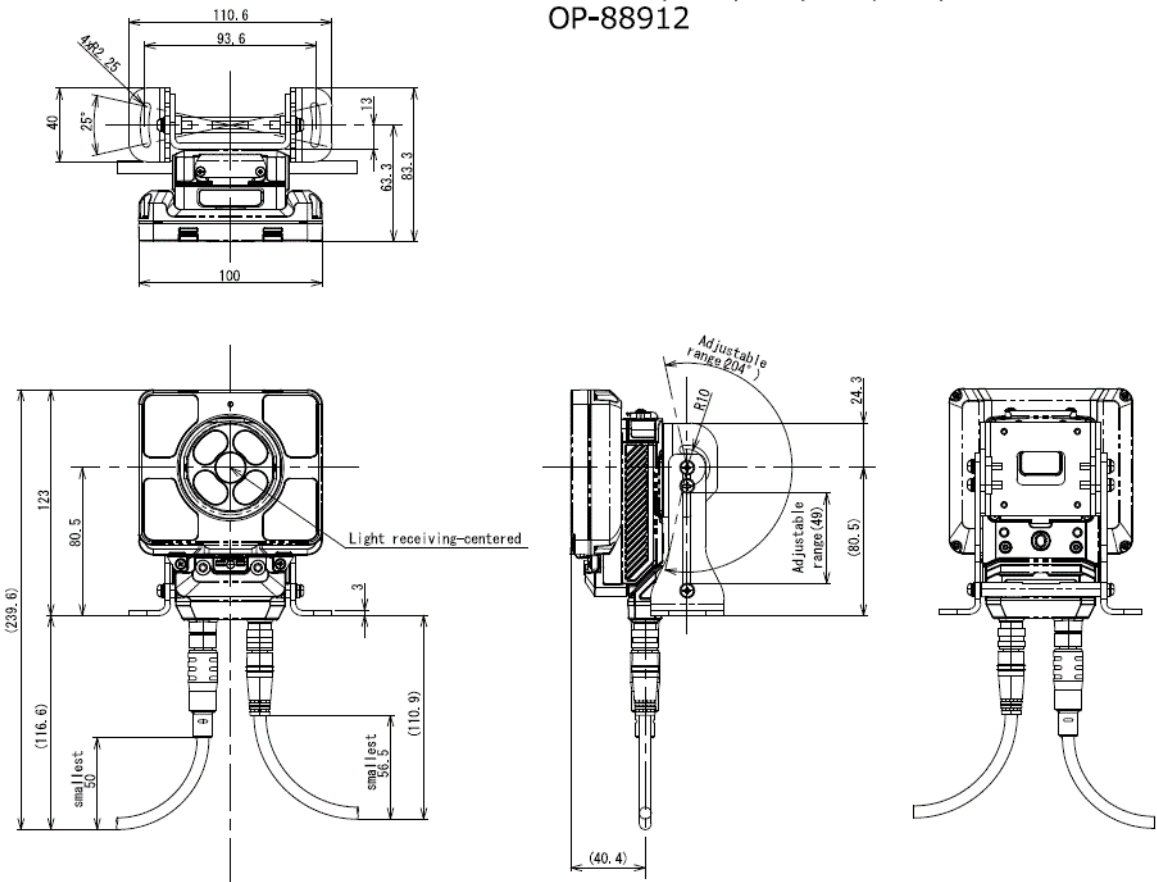

IV4-400CA/400MA/500CA/500MA/600CA/600MA
IV4-L4C/L4M/L5C/L5M/L6C/L6M
OP-88913

A support pipe of $\phi 12$ is not included
in OP-88913.

