



Y75


PERLeV&L® Capacitive Filling Level Probe - KFS 2 Limit value switching points

- For connection to the capacitive amplifier KFA-5-...-Y70
- Housing material: PTFE, Ø 16 mm / M 22 x 1.5



Technical data

Position of the switching point(s)	15, 75 mm
Type for evaluation unit Y70	KFS-52-15-180-15/75-PTFE/VAb-D16-M22-X02-Y75
Art.-No.	KF 0558
Permitted ambient temperature (for active zone)	-50...+250 °C
Degree of protection IEC 60529 (probe)	IP 67
Norm	EN 60947-5-2
Connection cable to the evaluation unit KFA-5-...-Y70	2 m coax-cable with connectors
Housing material	Stainless steel VA No. 1.4305 / AISI 303
Housing material active zone	PTFE (FDA 21 CFR 177.1550)
Accessories for mounting (not delivered with the probe) please see our selection of accessories.	

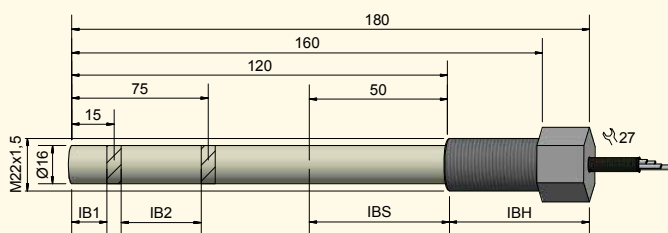

Technical data for connectors on request.

Other housing materials for the active zone (probe), like PVDF, PEEK or PE on request.

Made in Germany