



LV-NH100

Sensor head, Area Thrubeam, High performance



*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications


Model		LV-NH100
Type		Area thrubeam, High performance
FDA (CDRH) Part 1040.10		Class 1 Laser Product
IEC 60825-1		
Light source		Visible red semiconductor laser, Wavelength: 660 nm
Detecting distance	MEGA	2000 mm 78.74" (Detecting area: 10 mm 0.39")
	ULTRA	
	SUPER	
	TURBO	
	FINE	
	HSP	
Environmental resistance	Ambient temperature	-10 to +55 °C 14 to 131 °F (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
Material	Case	Glass reinforced plastic
	Lens cover	Transmitter: Glass, Receiver: Polyarylate
Weight		Approx. 75 g

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

LV-NH100 / NH110

Transmitter

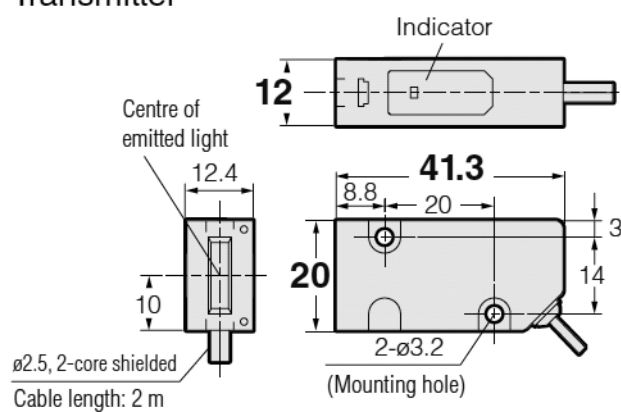

Receiver

