



LV-NH37

Sensor head, Spot Reflective, Ultra-small beam spot

(€

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications


Model		LV-NH37
Туре		Ultra-small beam spot
FDA (CDRH) Part 1040.10		Class 1 Laser Product
IEC 60825-1		
Light source		Visible red semiconductor laser, Wavelength: 660 nm
Detecting distance	MEGA	70±15 mm 2.76"±0.59"
	ULTRA	
	SUPER	
	TURBO	
	FINE	
	HSP	
Environmental resistance	Ambient temperature	-10 to +55 °C 14 to 131 °F (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
Material	Case	Glass reinforced plastic
	Lens cover	Glass (Receivers: Polyarylate)
Weight		Approx. 65 g




Dimensions

* Download CAD file or product manual for larger image/text and more detail.


LV-NH37

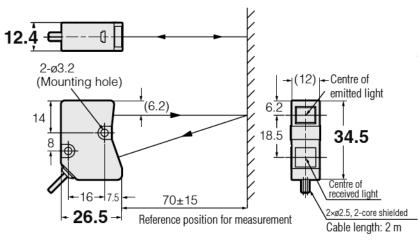


Mounting bracket for the LV-NH37 (accessory)

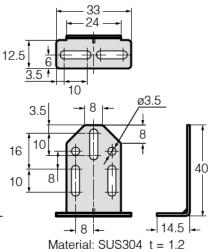

LV-NH37 (with bracket)

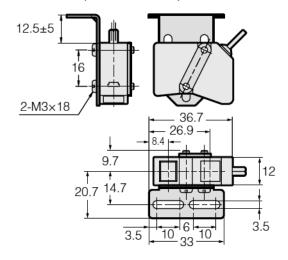

* Accessory screws M3×18 ···2 pieces



Material: SUS304 t = 1.5