


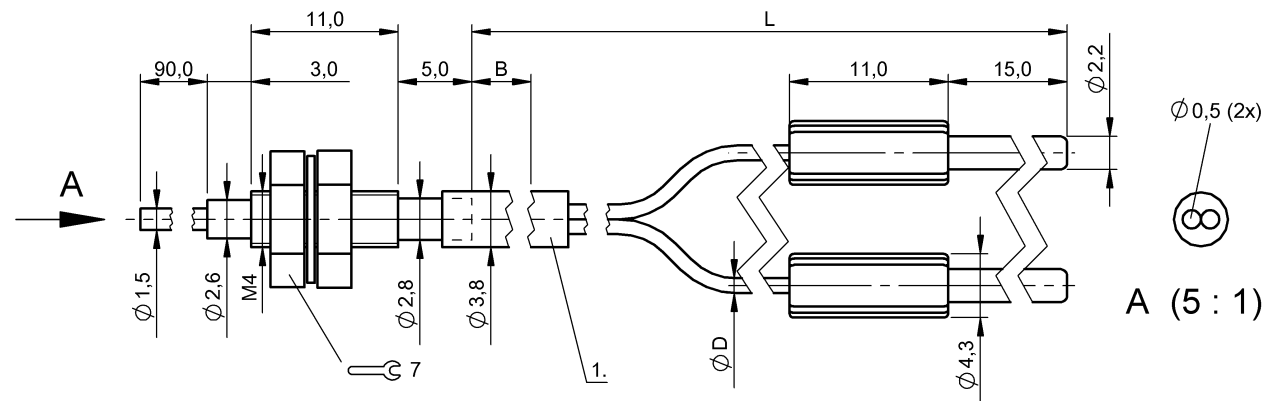

1) Protective tube

Basic features

Additional features	End ferrule Ø 1.5 mm may be bent, bending radius ≥ 10 mm
Basic standard	IEC 60947-5-2
Reference base unit	BFB 75K-001-..
Use	for fiber optic base units BFB
Version	M4, bendable tip

Environmental conditions

Ambient temperature	-55...70 °C
Ambient temperature connection area	Acc. to fiber optic sensor
IP rating	IP65

Material

Active surface, fiber arrangement	Adjacent to one another
Fiber type material	PMMA
Housing material	1.4301 stainless steel, nickel-plated Brass
Material jacket	PE
Surface protection	nickel-plated

Mechanical data

Active surface, fibers	Ø 0.5 mm (2x)
Cable diameter D	1.00 mm
Cable length L	2 m
Cable, bending radius min.	15 mm
Cable, note	can be trimmed
Connection	Ø 2.2 mm
Connection type	Adapter sleeve, 2.00 m, PE
Dimension	Ø 4 x 109 mm
Fiber optic cable, structure	Single fiber in plastic jacket
Length B min., without bending	10.00 mm
Mounting part	M4 nut
Tensile load max. at 20 °C	6 N (max. 3s)

Range/Distance

Range	50 mm
Rated operating distance Sn	50 mm
Real switching distance sr	50 mm

Remarks

The cutting tool is included in the scope of delivery
order other accessories separately.
Cut cable to length: use suitable cutting tool. Make a single cut, vertical to cable axis. The cut quality can affect the switching distance.
Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.
Route fiber optic cable so that no excessive tensile, compression or torsional forces are permitted. Observe permissible bending radiuses. Installation may affect the switching distance.

Opto Symbols

