



# FS-N43N

Amplifier Units Cable type Main unit NPN



\*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

## Specifications

Model		FS-N43N
Type		Cable
Output		NPN
Main unit/expansion unit		Main unit
Response time		23 $\mu$ s (S-HSPD*1*2) /50 $\mu$ s (HSPD*3) /250 $\mu$ s (FINE) /500 $\mu$ s (TURBO) /1 ms (SUPER) /4 ms (ULTRA) /16 ms (MEGA) /64 ms (TERA)
Number of control outputs		2
Number of external inputs		1
Light source LED		Transmitter side: Red, four-element LED (wavelength: 660 nm)
Control output		Open-collector, 30 V or less 100 mA or less per output, 100 mA or less total for 2 outputs (when used as a solitary unit) /20 mA or less (when used as an expansion unit) Residual voltage: 1.4 V or less (output current: 10 mA or less) /2 V or less (output current: 10 to 100 mA)
External input		Input time: 2 ms (ON) /20 ms (OFF) or longer*4
Unit expansion		Up to 16 units (17 units connected in total including the main unit) . However, each dual output type will be treated as two expansion units.
Protection circuit		Protection against reverse power connection, output overcurrent, output surge, and reverse output connection
Mutual interference prevention		S-HSPD/HSPD: 0 units, FINE: 4 units, TURBO/SUPER/ULTRA/MEGA/TERA: 8 units (The mutual interference prevention values are twice those shown here when Double is set.)
Power supply	Power voltage	10 to 30 VDC (including 10 % ripple (P-P) or less) , class 2 or LPS*5
	Power consumption	During normal operation: 870 mW or less (34 mA or less at 24 V/62 mA or less at 12 V) ECO ON: 800 mW or less (31 mA or less at 24 V/56 mA or less at 12 V) ECO FULL: 710 mW or less (28 mA or less at 24 V/49 mA or less at 12 V)*6
Environmental resistance	Ambient light	Incandescent lamp: 20,000 lx or less, sunlight: 30,000 lx or less
	Ambient temperature	-20 $^{\circ}$ C -4 $^{\circ}$ F to +55 $^{\circ}$ C +131 $^{\circ}$ F (no freezing)*7
	Vibration resistance	10 to 55 Hz; double amplitude 1.5 mm 0.06"; 2 hours each for X, Y, and Z axes
	Shock resistance	500 m/s <sup>2</sup> ; 3 times each for X, Y, and Z axes
Case material		Main unit and cover: polycarbonate
Weight		Approx. 83 g

\*1 Restrictions when S-HSPD is selected: Output 2 of dual output types is fixed to OFF.  
\*2 Restrictions when S-HSPD is selected  
Area detection, Area % Mode, DATUM, Rising edge, and Falling edge cannot be selected for Detection Mode.  
Output timer, Limit Detection, and Display Gain cannot be used.  
FULL cannot be selected for the ECO function.  
\*3 Restrictions when HSPD is selected  
Display Gain cannot be used.  
\*4 The input time becomes 25 ms (ON)/25 ms (OFF) when external calibration input is selected.

\*5 When expanding the system to 9 or more units, use a power supply voltage of 12 V or higher.

\*6 The load current is excluded. The power consumption including the load when the maximum number of units are connected is 38 W max.

\*7 When expanded by 1 to 2 units: -20°C -4°F to +55°C +131°F. When expanded by 3 to 10 units: -20°C -4°F to +50°C +122°F.

When expanded by 11 to 16 units: -20°C -4°F to +45°C +113°F. When using 2 outputs, 1 unit is counted as 2 units.

The prescribed values for the ambient temperature assume that the sensor amplifier has been mounted on a DIN rail installed on a metal surface. Exercise special care when installing the product in an airtight space.


## Dimensions

\* Download CAD file or product manual for larger image/text and more detail.

fs-n41\_n43\_dimension\_01.gif

### FS-N41N/N41P/N43N/N43P


#### Main Unit (Cable Type)

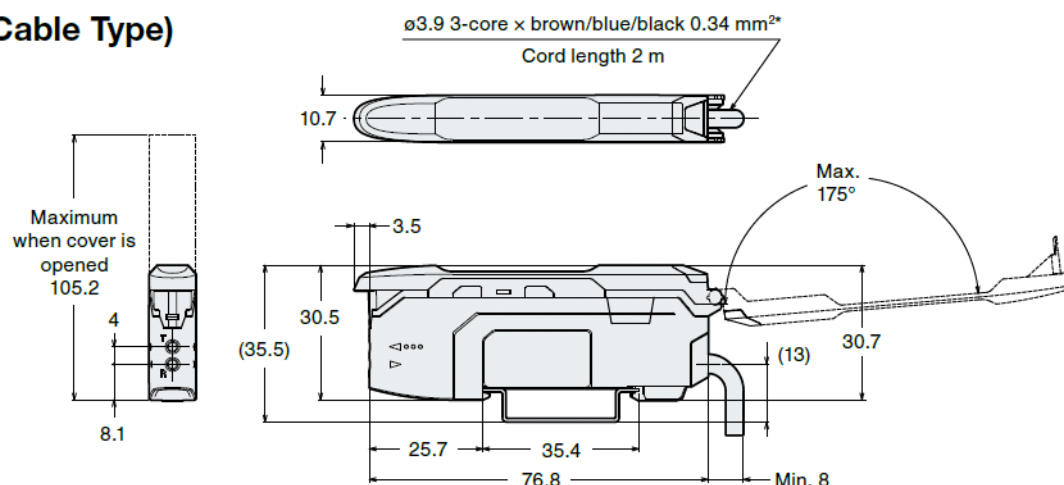

\* FS-N43N/N43P is ø3.9, 5-core x brown/blue 0.34 mm<sup>2</sup>, black/white/pink 0.18 mm<sup>2</sup>

### Amplifier Securing Bracket (OP-88245 Option, Sold Separately)

#### Cable Type

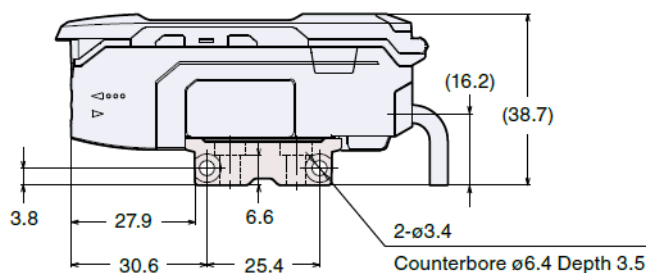

#### Back of securing bracket

